

JAX-9B

Weather fax

JRC



– a very compact and lightweight solution that allows for flexible operation

- 10” effective recording width**
 - Multiple recording modes available**
 - View image instantly with PC output option**
 - Automatic frequency selection**
 - Easy operation and highly reliable read-out**
-

JAX-9B Weather fax – performance features

Unique features

- The JAX-9B weather facsimile receiver is a very compact and lightweight solution, incorporating a set of enhanced features that allows for flexible operation.

Flexible operation and recording system

The received fax broadcasts are recorded on thermal recording paper, using a thermal head with less moving parts. JRC integrated an automatic frequency selection, allowing for optimised receiving. The JAX-9B can receive in four different modes.

- **Automatic recording** All operations can be remotely controlled to automatically start up, set parameters, receiving images, feed paper, and stop by remote signals from the broadcasting stations. Only halftone recording is manually controlled.
- **Manual recording** You can manually set the index of co-operation (IOC), scanning speed, and the halftone recording. The JAX-9B automatically records the stops in this mode.
- **Forced recording** This is an extensive function of the automatic recording mode. The JAX-9B can manually record while neither in automatic or manual recording mode, also while broadcasting is in progress. Phasing is done manually. It also adopts to a unique system to terminate phase matching instantaneously.
- **Timer programme recording** The period of the start and stop modes, station frequencies, and half-tone on/off are easy programmable. Whilst combined with the fully automatic mode, and unattended, error-free operation is made possible.

JRC StarNetwork™

JRC has been providing sales and support of products since 1915. Today, JRC offers comprehensive assistance through its organisation, in partnership with a worldwide StarNetwork™ of over 270 fully trained and qualified partners and agents, assisting you 24 hours a day, 7 days a week and 365 days a year.



JAX-9B Weather fax

– system flexibility

Fine half-tone recording

Pictures of clouds can be recorded in 16 gradation levels. This digital method ensures high resolution recording, using a proprietary system that finely reproduces maps and latitude and longitude grids with very fine and accurate lines.

Synthesised receiver

The built-in synthesised receiver is capable of setting any receiving frequency from the ten-key pad, and is able to preset up to 90 spot frequencies in the memory. This feature is very effective when receiving any new broadcast frequency and changing the station frequency.

Printout of frequencies and programme lists


Up to 90 channels of memory frequencies and up to 15 channels of programme lists can be printed out on the recording paper. This function is especially useful for setting programming and checking the stored frequencies.

Compact, lightweight design

The JAX-9B weather fax is remarkably compact and lightweight, allowing for a more flexible installation approach in confined spaces.

New enhanced interfaces

All received faxes can be displayed on your own PC, allowing you to view (and save) the image before seeing the actual recorded image. This function allows you to quickly view the image digitally, which greatly facilitates the need for immediate decisions. On top, the JAX-9B can also be configured for remote maintenance. JRC has developed a unique function that is capable for remotely monitoring and analysing for any faults that may occur in the system, allowing for prompt action and service.

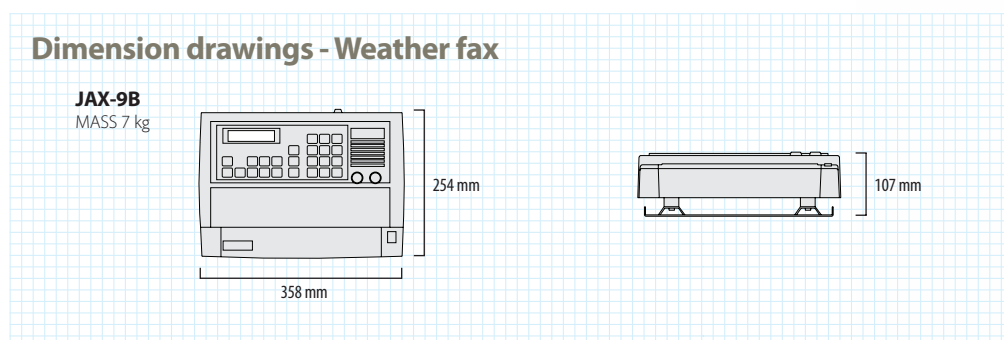

What's standard in the box?

1. Weather fax
2. Protective cover
3. Spare parts
4. RF connector (for antenna cable)
5. Recording paper (fitted in weather fax)
6. Manual (English)

JAX-9B Weather fax

– specifications

Model	JAX-9B	
Functional ability		
Recording system	solid state thermal head	
Recording paper	1) thermo sensitive recording paper	
Effective recording width	256mm (10")	
Index of cooperation (IOC)	576 or 288	
Scanning speed	60, 90, 120, 240 SPM	
Scanner resolution	8 dots/mm	
Scanning line density	approx. 7 lines/mm, 3.5 lines/mm	
Phase matching	automatic and manual	
Halftone recording	16 steps by dither pattern	
Negative/positive recording	manual	
External receiver connect.	0dBm, 600Ω	
Operation modes	automatic, manual, forced, timer programme	
Timer programme channel	15 channels	
JSC adapter connection	yes (for scrambled broadcasts)	
Setup data list recording	receiving frequency list, timer programme channel list	
Setup data storing	EEPROM	
Self test function	recording and panel test	
Automatic time correction	input via GPS data	
Image data output	display received images on PC (option)	
Remote maintenance	yes (option)	
Synthesised receiver		
Receiving system	phase locked type frequency synthesised with up-conversion and double super heterodyne type	
Frequency range	2.0000 to 24.9999 MHz	
Frequency selection	automatic	
Frequency memory	up to 90 channels	
Sensitivity	2μV (+6dBμ) or less for antenna input to obtain the output of -5dBm at 20dB S/N	
IF selectivity	6dB down point: 2.4 kHz to 3 kHz 66dB down point: 6 kHz or less	
Image rejection ratio	more than 60dB	
Environmental conditions		
Ambient temperature	operation: -15°C to +55°C	
Ambient humidity	93% (40°C) or less recording is 80% or less	
Power supply	DC 12/24/32V 10% to +30%, 70VA or less	
Optional items		
AC/DC power supply	NBA-5143	
PC interface kit	2) 7ZZNA4016	
Fax image display	3) 7ZZNA4017	
Joint box (cable insertion Ø12mm)	JQD-69C	
Whip antenna (6m)	NAW-60	
Antenna feeder	RG-10/U and RG-10/U	
Recording paper	6ZPTS00108	

1) Width 260mm and height 25m per roll

2) Terminal block (TB103) for PC connection - JRC RMS

3) RS422/USB converter, image viewer software and manual (requires 7ZZNA4016)

• Specifications may be subject to change without notice.

For further information, contact:



Since 1915

Japan Radio Co., Ltd.

URL <http://www.jrc.co.jp/eng/>

Main Office: Fujisawa bldg. 30-16, Ogikubo 4-chome
Suginami-ku, Tokyo 167-8540, Japan
Telephone: +81-3-6832-1816
Facsimile: +81-3-6832-1845

Overseas Branches : Seattle, Amsterdam, Athens, Manila
Liaison Offices : Taipei, Jakarta, Singapore, Hanoi,
Hamburg, New York